


Fig. CH150

- Válvula Check
- Acero Fundido · ASTM A-216 Gr., WCB, ANSI
- Dimensiones de acuerdo a ANSI B16.34
- Bridada · Clase 150

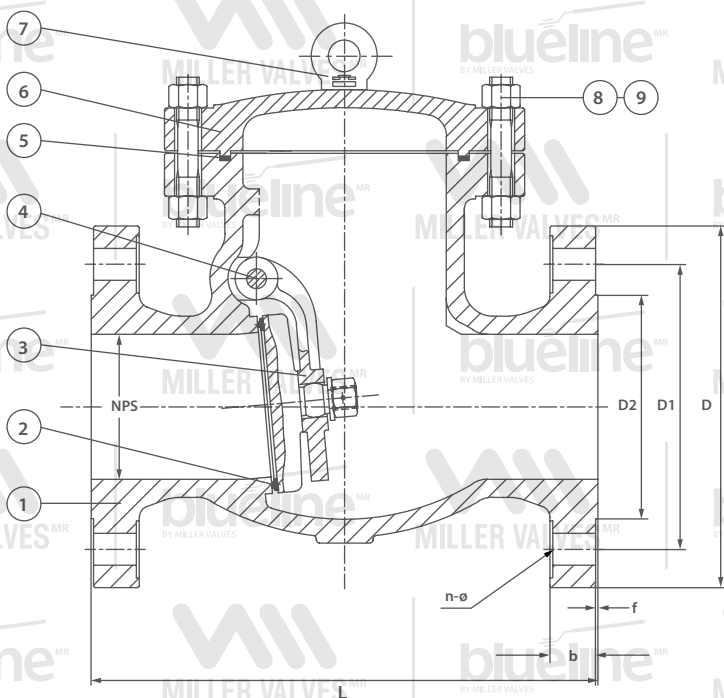

MATERIALES		
No.	Parte	Material
1	Caja	A216 WCB
2	Asiento	A105+STL
3	Disco	A215 WCB+13Cr
4	Sello de disco	507Mo
5	Perno cruzado	13Cr
6	Empaque	304+Grafito
7	Casquete	A216 WCB
8	Perno de argolla	1035
9	Perno	A193 B7
10	Tuerca	A194 2H

DIMENSIONES									
NPS	DN	L	D	D1	D2	b	f	z-φd	
2"	50	203	152	120.5	92	16	1.6	4-19	
2 1/2"	65	216	178	139.5	105	18	1.6	4-19	
3"	80	241	190	152.5	127	19	1.6	4-19	
4"	100	292	229	190.5	157	24	1.6	8-19	
5"	125	330	254	216	186	24	1.6	8-22	
6"	150	356	279	241.5	216	25.4	1.6	8-22	
8"	200	495	343	298.5	270	28.6	1.6	8-22	
10"	250	622	406	362	324	30.2	1.6	12-25	
12"	300	698	483	432	381	31.8	1.6	12-25	
14"	350	787	533	476	413	35	1.6	12-29	
16"	400	864	597	540	470	36.6	1.6	16-29	
18"	450	978	635	578	533	39.7	1.6	16-32	
20"	500	978	698	635	584	42.9	1.6	20-32	
24"	600	1295	813	749.5	692	49	1.6	20-35	

Aplicación

- 1 Diseño básico: API6D
- 2 Dimensiones cara a cara: ANSI B16.10
- 3 Dimensiones de brida de extremo: ANSI B16.5
- 4 Prueba estándar: API 598

ESPECIFICACIÓN DE RENDIMIENTO		
Presión nominal	150 lbs	
Prueba de resistencia	3	MPa
Prueba de sello superior		
Prueba de sello	2.2	
Prueba de sello de aire	0.6	