


Fig. CH300

- Válvula Check
- Acero Fundido • ASTM A-216 Gr., WCB, ANSI
- Dimensiones de acuerdo a ANSI B16.34
- Bridada • Clase 300

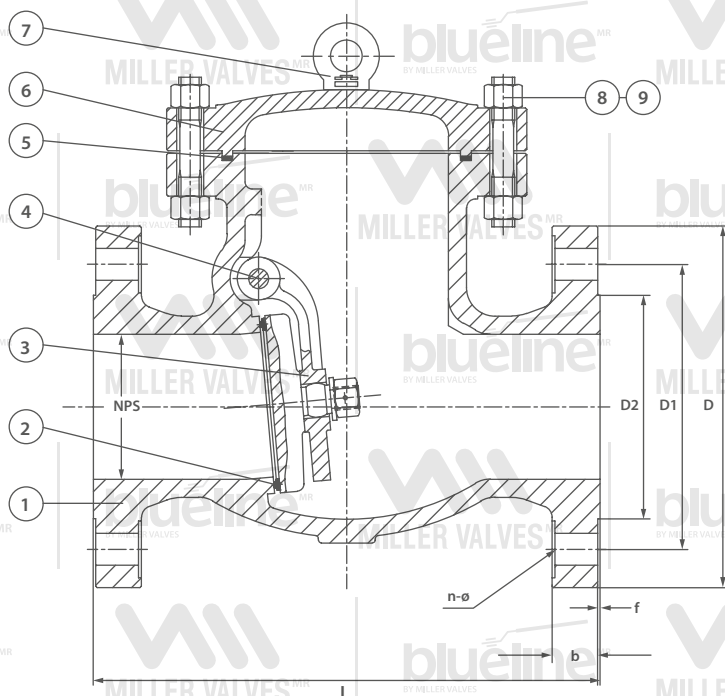

MATERIALES		
No.	Parte	Material
1	Caja	A216 WCB
2	Asiento	A105+STL
3	Disco	A215 WCB+13Cr
4	Sello de disco	507Mo
5	Perno cruzado	13Cr
6	Empaque	304+Grafito
7	Casquete	A216 WCB
8	Perno de argolla	1035
9	Perno	A193 B7
10	Tuerca	A194 2H

DIMENSIONES								
NPS	DN	L	D	D1	D2	b	f	z-φd
2"	50	267	165	127	92	22	1.6	8-19
2 1/2"	65	292	190	149	105	25	1.6	8-22
3"	80	318	210	168	127	29	1.6	8-22
4"	100	356	254	200	157	32	1.6	8-22
5"	125	400	279	235	186	35	1.6	8-22
6"	150	444	318	270	216	37	1.6	12-22
8"	200	533	381	330	270	41	1.6	12-25
10"	250	622	445	387.5	324	48	1.6	16-29
12"	300	711	521	451	381	51	1.6	16-32
14"	350	838	584	514.5	413	54	1.6	20-32
16"	400	864	648	571.5	470	57	1.6	20-35
18"	450	978	711	628.5	533	60	1.6	24-35
20"	500	1016	775	686	584	64	1.6	24-35
24"	600	1346	914	813	692	70	1.6	24-41

Aplicación

- 1 Diseño básico: API 6D
- 2 Dimensiones cara a cara: ANSI B16.10
- 3 Dimensiones de brida de extremo: ANSI B16.5
- 4 Prueba estándar: API 598