
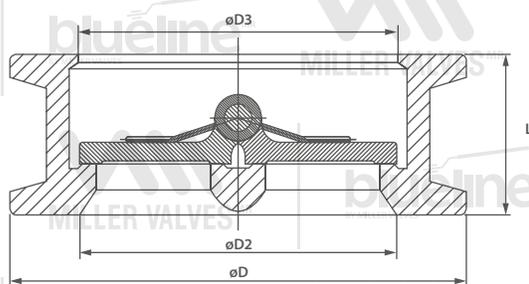
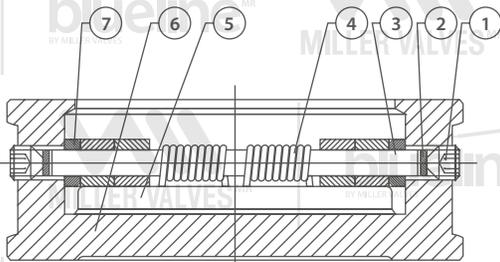


Fig. DCH150 AI

- Válvula Duo Check
- Cuerpo e interior de acero inoxidable tipo 316
- Clase 150

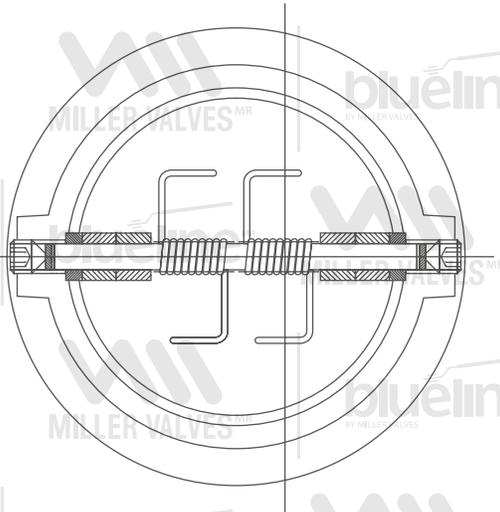

| MATERIALES | | |
|------------|------------------|----------|
| No. | Parte | Material |
| 1 | Tornillos | SS |
| 2 | Embalaje | NBR |
| 3 | Vástago | SS |
| 4 | Resorte | SS |
| 3 | Disco | CF8/CF8M |
| 6 | Caja | CF8/CF8M |
| 7 | Brida de cuentas | SS |

| DIMENSIONES | | | | |
|-------------|-----|-----|-----|-----|
| | D3 | D2 | D | L |
| 1 1/2" | 46 | 41 | 84 | 60 |
| 2" | 56 | 51 | 103 | 60 |
| 2 1/2" | 73 | 65 | 122 | 67 |
| 3" | 88 | 80 | 135 | 73 |
| 4" | 108 | 102 | 173 | 73 |
| 5" | 132 | 127 | 195 | 86 |
| 6" | 160 | 152 | 220 | 98 |
| 8" | 210 | 203 | 277 | 127 |
| 10" | 366 | 254 | 337 | 146 |
| 12" | 310 | 305 | 407 | 181 |

| PARÁMETRO TÉCNICO PRINCIPAL | | |
|--------------------------------------|-------------|-----|
| Presión nominal | 2.0 | MPa |
| Prueba de presión de carcasa | 3.0 | |
| Prueba de hermeticidad | 2.2 | |
| Prueba de estanqueidad a los gases | 0.4~0.7 | |
| Temperatura de operación | -29° ~200°C | |
| Medio aplicable: Agua, aceite y gas. | | |