


Fig. CH800 SW

- Válvula Check
- Acero al carbón forjado A105
- Soldable SW
- Clase 800

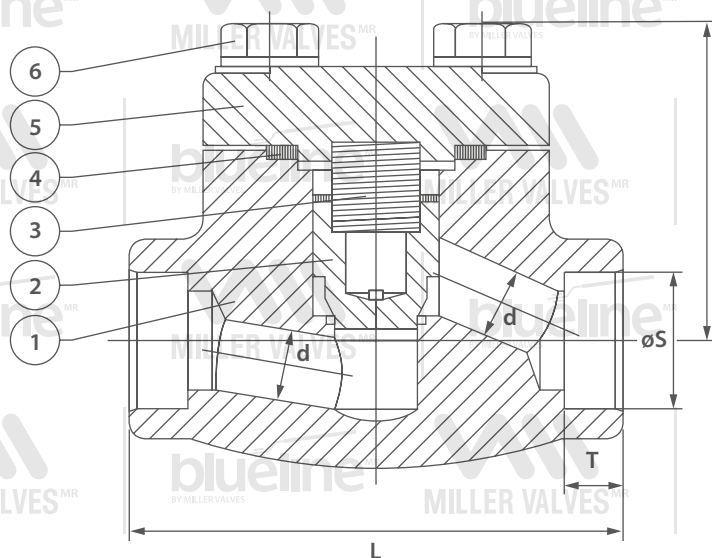

MATERIALES		
No.	Parte	Material
1	Caja	ASTM A105
2	Disco	13Cr+STL
3	Resorte	SS304
4	Empaque	SS304+Grafito
5	Casquete	ASTM A105
6	Tornillo	A193 B7

DIMENSIONES					
NPS	L	H	d	ØS	T
1/2	79	56	10.0	21.8	10
3/4	92	58	12.0	27.2	13
1	111	68	17.0	33.9	13
1-1/4	120	83	22.5	42.7	13
1-1/2	152	88	28.0	48.8	13
2	172	108	35.0	61.2	16

ESPECIFICACIÓN DE RENDIMIENTO		
Presión nominal	800	Lbs
Prueba de fuga de carcasa (HYD.)	20.7	MPa
Prueba de sello posterior (HYD.)	—	
Prueba de sello (HYO.)	15.2	
Orueba de gas (AIR.)	—	MPa
Temperatura de operación	-29°~425°C	

REQUERIMIENTO TÉCNICO

1. Diseño y fabricación AP1 602
2. Dimensiones cara a cara Fabricante
3. Dimensiones de los extremos de soldadura a encaje ASME B16.11
4. Inspección y pruebas de válvulas API 598
5. Presión y rango de temperaturas ASME B16.34